

SPECIFICATION SHEET

Talento 471 & 472

PRODUCT/ORDER CODE

Talento 471 single channel 16 Amps

Talento 472 two channel 2 x 16 amps

General information

These products are suitable for din-rail mounting.

Talento 471 is a single channel unit with 30 programme spaces.
Talento 472 is a two channel unit with 40 programme spaces.

Features common to both products are:

Suitable for 24 hour and/or 7 day programming and control.

Pulse and cycle output capability (see below)

Built-in lithium cell giving 3 year reserve.

Automatic summer / winter changeover.

Technical specification:

Dimensions 85 x 35 x 60 (2-modules)

Weight 170g

AC switching capacity:

- resistive load 16A 250v AC

- inductive load cos ϕ 0.6 2.5A 250v AC

- incandescent lamp load 1000W


Contact type volt-free changeover

Ambient temperature -25°C to +55°C


Accuracy typically + / - 2.5 seconds/day @ 20°C

Minimum switching time 1 minute

Manual override Advance on / off or Fix on / Fix off
(advance on / off is self-resetting)

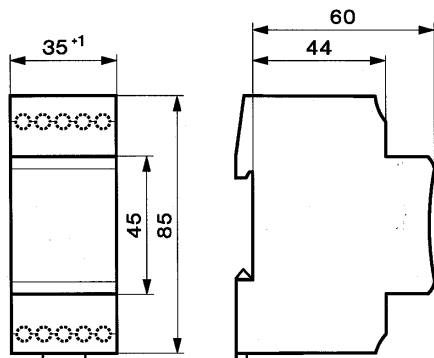

Pulse output



Cycle output



- **Pulse switching command – a single (ON) output for any duration between one and ninety-nine seconds, or one and ninety-nine minutes.**
- **Cycle switching command – a series of repeating ON / OFF outputs. The ON and OFF duration can be of any duration between one and ninety-nine seconds, or one and ninety-nine minutes. Once durations are set, they will repeat for the whole of the cycle time.**